

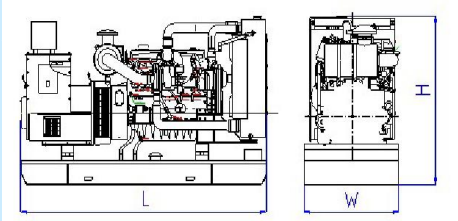
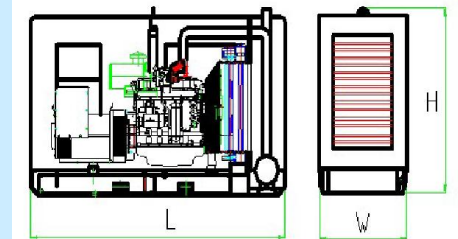
## ENLC40-3

Standby power : 40KVA/32KW

Prime power : 38KVA/30KW

### Standard features

- Engine: CUMMINS , 4BT3.9-G2
- Charge alternator : 24V
- Governor : Electrical
- Generator : LEROY SOMER , LSA42.3 S5
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<p><b>Open Type</b></p> <p>Overall size (L*W*H) 1800mm×820mm×1355mm</p> <p>Weight: 860kg</p>
	<p><b>Silent Type</b></p> <p>Overall size (L*W*H) 2150mm×1000mm×1200mm</p> <p>Weight: 1248kg</p>

### Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/277	60	3	0.8	48	40/32	38/32

### Engine data

Manufacturer/Model	CUMMINS 4BT3.9-G2 4-cycle
Cylinder /Arrangement	4 / L
Displacement	3.9 L
Bore and Stroke	102 mm×120 mm
Compression ratio	16.5 : 1
Rated RPM	1800RPM
Max. stand by power at rated RPM	65KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

**Exhaust System**

Exhaust gas flow	108 L/s
Exhaust temperature	487°C
Max back pressure	10kPa

**Fuel System**

Fuel consumption100% (of the Prime Power)	214 g/Kw.h
---	------------

**Oil System**

Total oil capacity w/filters	11L
------------------------------	-----

**Air intake**

Engine air flow	45L/s
-----------------	-------

**Coolant System**

Radiator & engine capacity	21L
Max water temperature	104°C
Thermostat	82-95°C

**Generator Data**

**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA42.3 S5 ( LEROY SOMER ) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel**

**Optional:** DSE3110, AMF20 , HGM6110 , HGM6120.....



The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .