

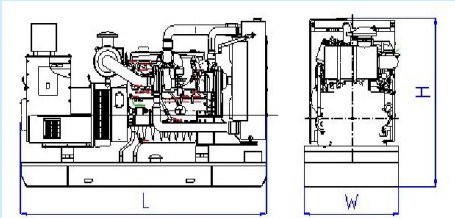
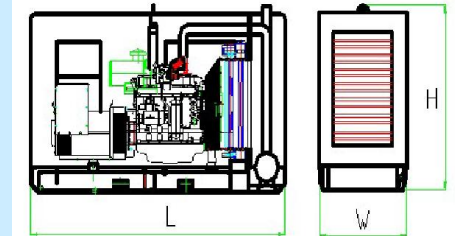
## ENLC825-3

Standby power : 825KVA/660KW

Prime power : 750KVA/600KW

### Standard features

- Engine: CUMMINS , KTA38-G2
- Charge alternator : 24V
- Governor : Electrical
- Generator : LEROY SOMER , LSA49.1M65
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<p><b>Open Type</b></p> <p>Overall size (L*W*H) 4345mm×2060mm×2460mm</p> <p>Weight: 6996kg</p>
	<p><b>Silent Type</b></p> <p>Overall size (L*W*H) 6058mm×2438mm×2591mm</p> <p>Weight: 10174kg</p>

### Generator Ratings

3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
400/230	50	3	0.8	1191	825/660	750/600

### Engine data

Manufacturer/Model	CUMMINS KTA38-G2 4-cycle
Cylinder /Arrangement	12 / 60°V
Displacement	37.8L
Bore and Stroke	159mm×159mm
Compression ratio	14.5: 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	731KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrica

**Exhaust System**

Exhaust gas flow	2634 L/s
Exhaust temperature	552°C
Max back pressure	76mmHg

**Fuel System**

Fuel consumption100% (of the Prime Power)	167 L / h
---	-----------

**Oil System**

Total oil capacity w/filters	135.0 L
------------------------------	---------

**Air intake**

Engine air flow	920 L/s
-----------------	---------

**Coolant System**

Radiator & engine capacity	210.0 L
Max water temperature	104°C
Thermostat	82-93°C

**Generator Data**

**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA49.1 M65 ( LEROY SOMER ) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel****Optional:** DSE3110, AMF20, HGM6110, HGM6120.....

The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .