

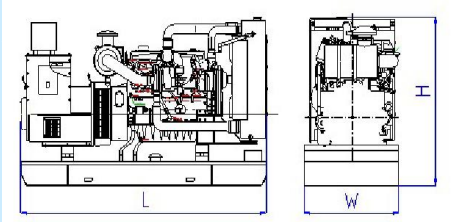
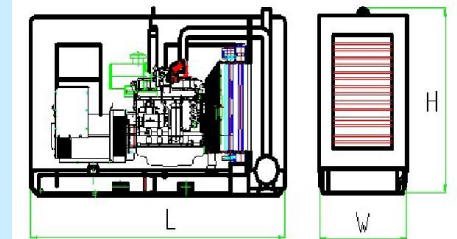
ENLD385-3

Standby power : 385KVA/308KW

Prime power : 350KVA/280KW

Standard features

- Engine: DEUTZ , BF6M1015C-LA G4
- Charge alternator : 24V
- Governor : EMR
- Generator : LEROY SOMER , LSA47.2 VS1
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	Open Type Overall size (L*W*H) 2700mm×1385mm×2065mm Weight: 2350kg
	Silent Type Overall size (L*W*H) 3790mm×1560mm×2150mm Weight: 2950kg

Generator Ratings

3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
400/230	50	3	0.8	546	385/308	350/280

Engine data

Manufacturer/Model	DEUTZ, BF6M1015C-LA G4 4-cycle
Cylinder /Arrangement	6 / L
Displacement	11.906L
Bore and Stroke	132mm×145mm
Compression ratio	16.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	345KW
Frequency regulation , steady state	≤ 1%
Governor : type	EMR

Exhaust System

Exhaust gas flow	28.6m ³ /min
Exhaust temperature	520°C
Max back pressure	5kPa

Fuel System

Fuel consumption100% (of the Prime Power)	71L/h
---	-------

Oil System

Total oil capacity w/filters	38L
------------------------------	-----

Air intake

Engine air flow	276m ³ /min
-----------------	------------------------

Coolant System

Radiator & engine capacity	47L
Max water temperature	103°C
Thermostat	79-102°C

Generator Data**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA47.2 VS1 (LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

Control panel

Optional: DSE3110, AMF20 , HGM6110 , HGM6120.....



The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .