

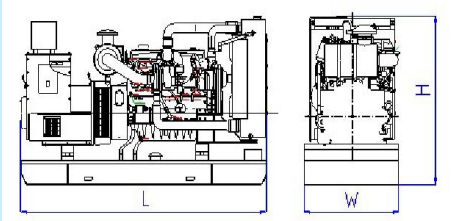
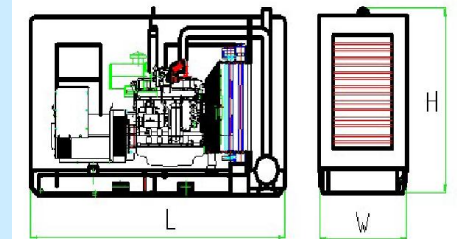
## ENLL80-3

Standby power : 80KVA/64KW

Prime power : 72KVA/58KW

### Standard features

- Engine: LOLVO ,1004TG
- Charge alternator : 24V
- Governor : : Mechanical
- Generator : LEROY SOMER , LSA42.3 L9
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<p><b>Open Type</b></p> <p>Overall size (L*W*H) 2130mm×710mm×1480mm</p> <p>Weight: 1300kg</p>
	<p><b>Silent Type</b></p> <p>Overall size (L*W*H) 3146mm×1056mm×1850mm</p> <p>Weight: 1611kg</p>

### Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/277	60	3	0.8	87	80/64	72/58

### Engine data

Manufacturer/Model	LOLVO ,1004TG1A, 4-cycle
Cylinder /Arrangement	4 / L
Displacement	3.99 L
Bore and Stroke	100 mm×127 mm
Compression ratio	17.5 : 1
Rated RPM	1800 RPM
Max. stand by power at rated RPM	83KW
Frequency regulation , steady state	≤ 1%
Governor : type	Mechanical

**Exhaust System**

Exhaust gas flow	13.1 m <sup>3</sup> /min
Exhaust temperature	630°C
Max back pressure	6kPa

**Fuel System**

Fuel consumption100% (of the Prime Power)	17.1L/h
-------------------------------------------	---------

**Oil System**

Total oil capacity w/filters	8.5 L
------------------------------	-------

**Air intake**

Engine air flow	4.71 m <sup>3</sup> /min
-----------------	--------------------------

**Coolant System**

Radiator & engine capacity	22.2 L
Max water temperature	100°C
Thermostat	82-88°C

**Generator Data**

**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA42.3 L9 ( LEROY SOMER ) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel****Optional:** DSE3110, AMF20, HGM6110, HGM6120.....

The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .