

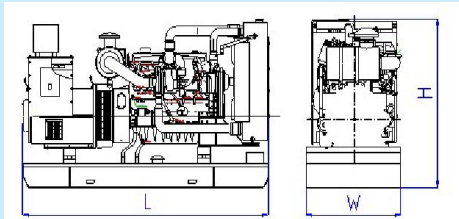
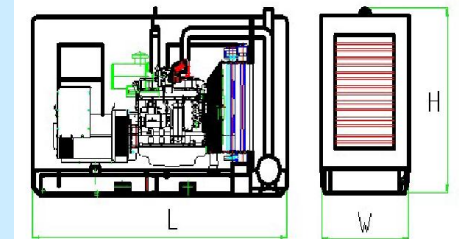
ENLC1250-3

Standby power : 1250KVA/1000KW

Prime power : 1125KVA/900KW

Standard features

- Engine: CUMMINS , KTA38-G4
- Charge alternator : 24V
- Governor : Electrical
- Generator : LEROY SOMER , LSA49.1 L11
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	Open Type Overall size (L*W*H) 4345mm×2060mm×2460mm Weight: 7386kg
	Silent Type Overall size (L*W*H) 12192mm×2438mm×2896mm Weight: 14336kg

Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/277	60	3	0.8	1503	1250/1000	1125/900

Engine data

Manufacturer/Model	CUMMINS KTA38-G4 4-cycle
Cylinder /Arrangement	12 / 60°V
Displacement	37.8L
Bore and Stroke	159mm×159mm
Compression ratio	13.9: 1
Rated RPM	1800 RPM
Max. stand by power at rated RPM	1112KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrica

Exhaust System

Exhaust gas flow	3967 L/s
Exhaust temperature	524°C
Max back pressure	10kPa

Fuel System

Fuel consumption100% (of the Prime Power)	207 g/Kw.h
---	------------

Oil System

Total oil capacity w/filters	135.0 L
------------------------------	---------

Air intake

Engine air flow	1435L/s
-----------------	---------

Coolant System

Radiator & engine capacity	258L
Max water temperature	104°C
Thermostat	82-93°C

Generator Data

Optional: STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA49.1 L11 (LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

Control panel**Optional:** DSE3110, AMF20, HGM6110, HGM6120.....

The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .