

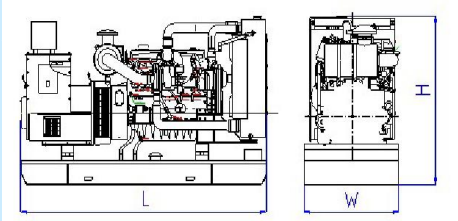
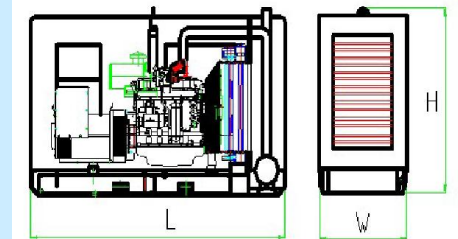
## ENLD900-3

Standby power : 900KVA/726KW

Prime power : 825KVA/660KW

### Standard features

- Engine: DOOSAN , DP222LC
- Charge alternator : 24V
- Governor : Electrical
- Generator : LEROY SOMER , LSA49.1 M6
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 45°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<b>Open Type</b> Overall size (L*W*H) 3650mm×1400mm×2015mm Weight: 3948kg
	<b>Silent Type</b> Overall size (L*W*H) 6058mm×2438mm×2591mm Weight: 6870kg

### Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/277	60	3	0.8	1191	900/726	7825/660

### Engine data

Manufacturer/Model	DOOSAN DP222LC 4-cycle
Cylinder /Arrangement	12 / V
Displacement	21.927 L
Bore and Stroke	128 mm×142 mm
Compression ratio	15 : 1
Rated RPM	1800 RPM
Max. stand by power at rated RPM	828KW
Frequency regulation , steady state	± 0.25%
Governor : type	Electrical

**Exhaust System**

Exhaust gas flow	108 m <sup>3</sup> /min
Exhaust temperature	487°C
Max back pressure	5.9kpa

**Fuel System**

Fuel consumption100% (of the Prime Power)	183 L / h
---	-----------

**Oil System**

Total oil capacity w/filters	40 L
------------------------------	------

**Air intake**

Engine air flow	45 m <sup>3</sup> /min
-----------------	------------------------

**Coolant System**

Radiator & engine capacity	114 L
Max water temperature	103°C
Thermostat	71-85°C

**Generator Data**

**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA49.1 M6( LEROY SOMER ) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel****Optional:** DSE3110, DSE6020, HGM6110, HGM6120.....

- ☆ Compact genset controller for single genset operating in standby mode;
- ☆ Meets all requirements for Auto Mains Failure (AMF) applications;
- ☆ Full gen-set monitoring and protection;
- ☆ Running hours event and performance log;
- ☆ Multiple languages (user changeable) in controller, even more in installation suite;
- ☆ Web Supervisor, Air Gate and Locate support\*
- ☆ Plug-in extension modules capability;
- ☆ Automatic SMS on alarm or event & gen-set control over SMS\*;
- ☆ Supports prime mover (MRS) applications;
- ☆ Automatic and manual GCB and MCB control;
- ☆ Optional GSM/GPRS modem/wireless Internet via IL-NT GPRS
- ☆ D+ pre-excitation terminal;

Note: All data sheets are for reference only and subject to change without prior notice.