



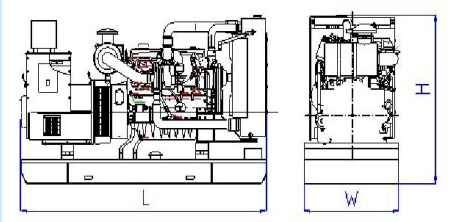
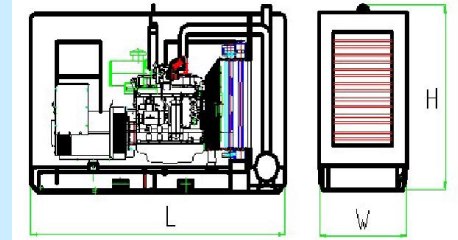
ENLM1500-3

Standby power : 1500KVA/1200KW

Prime power : 1375KVA/1100KW

Standard features

- Engine: MTU , 12V4000G23R
- Charge alternator : 24V
- Governor : ADEC
- Generator : LEROY SOMER , LSA50.2 L7
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 40°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	Open Type Overall size (L*W*H) 6150mm×2150mm×2400mm Weight: 12000kg
	Silent Type Overall size (L*W*H) 6058mm×2438mm×2896mm Weight: 17000kg

Generator Ratings

3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
400/230	50	3	0.8	2165	1500/1200	1375/1100

Engine data

Manufacturer/Model	MTU , 12V4000G23R
Cylinder /Arrangement	12 in "V"
Displacement	57.2L
Bore and Stroke	170 mm×210mm
Compression ratio	16.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1205 KW
Frequency regulation , steady state	≤ 1%
Governor : type	ADEC

**Exhaust System**

Exhaust gas flow	204m ³ /min
Exhaust temperature	430°C
Max back pressure	8.5kPa

Fuel System

Fuel consumption100% (of the Prime Power)	195 g/kwh
---	-----------

Oil System

Total oil capacity w/filters	260L
------------------------------	------

Air intake

Burning Capacity	84m ³ /min
------------------	-----------------------

Coolant System

Radiator & engine capacity	200L
Max water temperature	79°C
Thermostat	104°C

Generator Data

Optional: STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA50.2 L7 (LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel****Optional:** DSE3110, AMF20, HGM6110, HGM6120.....

The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .