

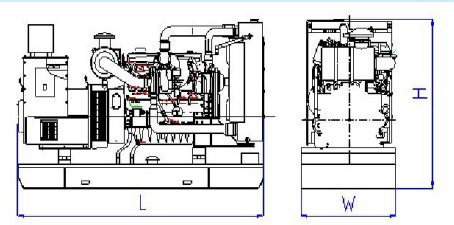
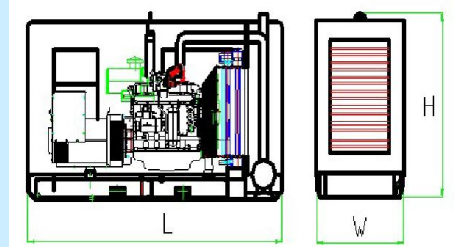
ENLP2200-3

Standby power : 2200KVA/1760KW

Prime power : 2000KVA/1600KW

Standard features

- Engine: PERKINS , 4016TAG2A
- Charge alternator :24V
- Governor : Electrical
- Generator : LEROY SOMER , LSA51.2 M60
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 45°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<p>Open Type</p> <p>Overall size (L*W*H) 5725mm×2630mm×3150mm Weight:14621kg</p>
	<p>Silent Type</p> <p>Overall size (L*W*H) 12000mm×3200mm×3670mm Weight:22121kg</p>

Generator Ratings

3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
400/230	50	3	0.8	2858	1980/1584	1800/1440

Engine data

Manufacturer/Model	PERKINS 4016TAG2A 4-cycle
Cylinder /Arrangement	12 / 60°V
Displacement	61.123 L
Bore and Stroke	160mm×190mm
Compression ratio	13.6: 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1937KW
Frequency regulation , steady state	± 0.25%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	387m ³ /min
Exhaust temperature	493°C
Max back pressure	673mmH ₂ O

Fuel System

Fuel consumption100% (of the Prime Power)	434L / h
---	----------

Oil System

Total oil capacity w/filters	214 L
------------------------------	-------

Air intake

Engine air flow	145m ³ /min
-----------------	------------------------

Coolant System

Radiator & engine capacity	316 L
Max water temperature	101°C
Thermostat	71-85°C

Generator Data

Optional: STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA51.2 M60(LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

Control panel**Optional:** DSE3110, DSE6020, HGM6120, HGM6120.....

- ☆ Compact genset controller for single genset operating in standby mode;
- ☆ Meets all requirements for Auto Mains Failure (AMF) applications;
- ☆ Full gen-set monitoring and protection;
- ☆ Running hours event and performance log;
- ☆ Multiple languages (user changeable) in controller, even more in installation suite;
- ☆ Web Supervisor, Air Gate and Locate support*
- ☆ Plug-in extension modules capability;
- ☆ Automatic SMS on alarm or event & gen-set control over SMS*;
- ☆ Supports prime mover (MRS) applications;
- ☆ Automatic and manual GCB and MCB control;
- ☆ Optional GSM/GPRS modem/wireless Internet via IL-NT GPRS
- ☆ D+ pre-excitation terminal;

Note: All data sheets are for reference only and subject to change without prior notice.