

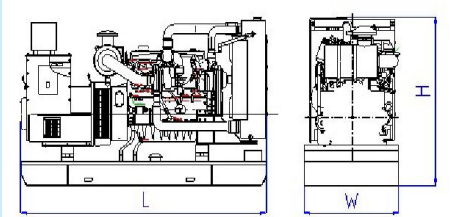
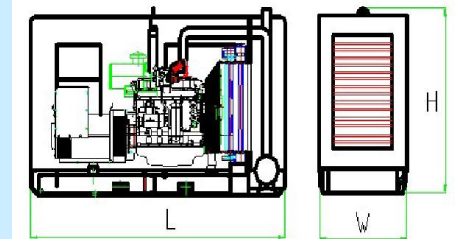
ENLL110-3

Standby power : 110KVA/88KW

Prime power : 100KVA/80KW

Standard features

- Engine: LOLVO , 1006TG1A
- Charge alternator : 24V
- Governor : : Mechanical
- Generator : LEROY SOMER , LSA43.2 L8
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	Open Type Overall size (L*W*H) 2480mm×710mm×1480mm Weight: 1490kg
	Silent Type Overall size (L*W*H) 3146mm×1056mm×1850mm Weight: 1611kg

Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/230	60	3	0.8	132	110/88	100/80

Engine data

Manufacturer/Model	LOLVO , 1006TG1A, 4-cycle
Cylinder /Arrangement	6 / L
Displacement	5.99 L
Bore and Stroke	100 mm×127 mm
Compression ratio	17.5 : 1
Rated RPM	1800 RPM
Max. stand by power at rated RPM	107KW
Frequency regulation , steady state	≤ 1%
Governor : type	Mechanical

**Exhaust System**

Exhaust gas flow	16.97 m ³ /min
Exhaust temperature	545°C
Max back pressure	6kPa

Fuel System

Fuel consumption100% (of the Prime Power)	22.7L/h
---	---------

Oil System

Total oil capacity w/filters	16.1 L
------------------------------	--------

Air intake

Engine air flow	5.69 m ³ /min
-----------------	--------------------------

Coolant System

Radiator & engine capacity	27.7 L
Max water temperature	103°C
Thermostat	82-88°C

Generator Data

Optional: STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA43.2 L8 (LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

Control panel

Optional: DSE3110, AMF20 , HGM6110 , HGM6120.....



The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .