

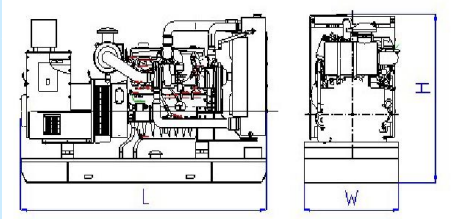
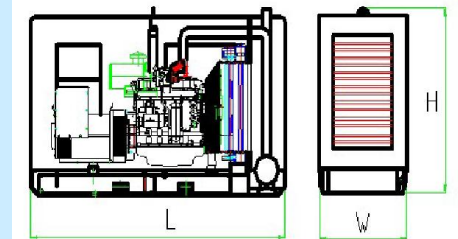
## ENLD600-3

Standby power : 600KVA/480KW

Prime power : 550KVA/440KW

### Standard features

- Engine: DEUTZ , BF8M1015CP-LA G4
- Charge alternator : 24V
- Governor : EMR
- Generator : LEROY SOMER , LSA47.2 M8
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<b>Open Type</b> Overall size (L*W*H) 3120mm×1550mm×2080mm Weight: 3550kg
	<b>Silent Type</b> Overall size (L*W*H) 4360mm×1660mm×2550mm Weight: 4900kg

### Generator Ratings

3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
400/230	50	3	0.8	866	600/480	550/440

### Engine data

Manufacturer/Model	DEUTZ, BF8M1015CP-LA G4 4-cycle
Cylinder /Arrangement	8/ L
Displacement	15.874L
Bore and Stroke	132mm×145mm
Compression ratio	16.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	530KW
Frequency regulation , steady state	≤ 1%
Governor : type	EMR

**Exhaust System**

Exhaust gas flow	40m <sup>3</sup> /min
Exhaust temperature	600°C
Max back pressure	5kPa

**Fuel System**

Fuel consumption100% (of the Prime Power)	125L/h
---	--------

**Oil System**

Total oil capacity w/filters	48L
------------------------------	-----

**Air intake**

Engine air flow	276m <sup>3</sup> /min
-----------------	------------------------

**Coolant System**

Radiator & engine capacity	60L
Max water temperature	103°C
Thermostat	79-102°C

**Generator Data**

**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA47.2 M8 ( LEROY SOMER ) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel**

**Optional:** DSE3110, AMF20 , HGM6110 , HGM6120.....



The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .