

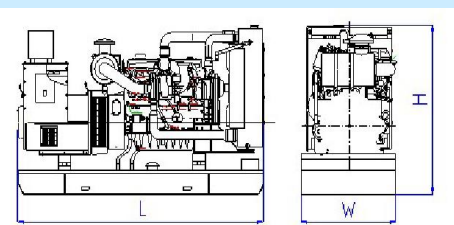
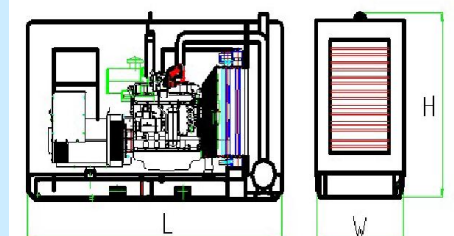
ENLP700-3

Standby power : 700KVA/560KW

Prime power : 650KVA/520KW

Standard features

- Engine: PERKINS , 2806A-E18TAG2
- Charge alternator :24V
- Governor : ECM
- Generator : LEROY SOMER , LSA49.1 S4
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<p>Open Type</p> <p>Overall size (L*W*H) 3400mm×1540mm×1960mm</p> <p>Weight: 4330kg</p>
	<p>Silent Type</p> <p>Overall size (L*W*H) 5306mm×1706mm×3015mm</p> <p>Weight:5748kg</p>

Generator Ratings

3-PH, 50Hz@1500RPM, 400/230V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
400/230	50	3	0.8	1011	700/560	650/520

Engine data

Manufacturer/Model	PERKINS 2806A-E18TAG2 4-cycle
Cylinder /Arrangement	6/ L
Displacement	18.13L
Bore and Stroke	145mm×183mm
Compression ratio	14.5 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	628 KW
Frequency regulation , steady state	± 0.25%
Governor : type	ECM

Exhaust System

Exhaust gas flow	114m ³ /min
Exhaust temperature	553℃
Max back pressure	6.9kPa

Fuel System

Fuel consumption100% (of the Prime Power)	132L / h
---	----------

Oil System

Total oil capacity w/filters	62L
------------------------------	-----

Air intake

Engine air flow	40m ³ /min
-----------------	-----------------------

Coolant System

Radiator & engine capacity	61L
Max water temperature	103℃
Thermostat	88-98℃

Generator Data

Optional: STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA49.1 S4(LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

Control panel**Optional:** DSE3110, DSE6020, HGM6110, HGM6120.....

- ☆ Compact genset controller for single genset operating in standby mode;
- ☆ Meets all requirements for Auto Mains Failure (AMF) applications;
- ☆ Full gen-set monitoring and protection;
- ☆ Running hours event and performance log;
- ☆ Multiple languages (user changeable) in controller, even more in installation suite;
- ☆ Web Supervisor, Air Gate and Locate support*
- ☆ Plug-in extension modules capability;
- ☆ Automatic SMS on alarm or event & gen-set control over SMS*;
- ☆ Supports prime mover (MRS) applications;
- ☆ Automatic and manual GCB and MCB control;
- ☆ Optional GSM/GPRS modem/wireless Internet via IL-NT GPRS
- ☆ D+ pre-excitation terminal;

Note: All data sheets are for reference only and subject to change without prior notice.