

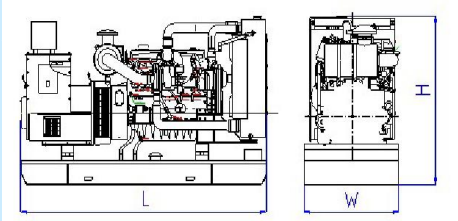
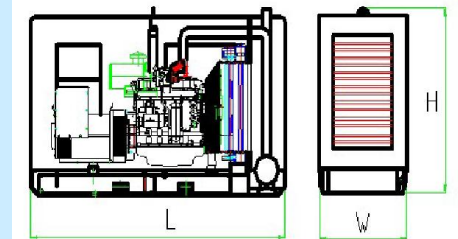
## ENLL150-3

Standby power : 150KVA/120KW

Prime power : 135KVA/108KW

### Standard features

- Engine: LOLVO , 1006TAG1A
- Charge alternator : 24V
- Governor : : Mechanical
- Generator : LEROY SOMER , LSA44.2 VS45
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

	<p><b>Open Type</b></p> <p>Overall size (L*W*H) 2580mm×710mm×1480mm</p> <p>Weight: 1750kg</p>
	<p><b>Silent Type</b></p> <p>Overall size (L*W*H) 436mm×1156mm×1968mm</p> <p>Weight: 2025kg</p>

### Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/277	60	3	0.8	162	135/108	120/96

### Engine data

Manufacturer/Model	LOLVO , 1006TAG1A, 4-cycle
Cylinder /Arrangement	6 / L
Displacement	5.99 L
Bore and Stroke	100 mm×127 mm
Compression ratio	17.5 : 1
Rated RPM	1800 RPM
Max. stand by power at rated RPM	130KW
Frequency regulation , steady state	≤ 1%
Governor : type	Mechanical

**Exhaust System**

Exhaust gas flow	17.68 m <sup>3</sup> /min
Exhaust temperature	550°C
Max back pressure	6kPa

**Fuel System**

Fuel consumption100% (of the Prime Power)	30.3L/h
---	---------

**Oil System**

Total oil capacity w/filters	16.1 L
------------------------------	--------

**Air intake**

Engine air flow	6.0 m <sup>3</sup> /min
-----------------	-------------------------

**Coolant System**

Radiator & engine capacity	27.7 L
Max water temperature	103°C
Thermostat	82-88°C

**Generator Data**

**Optional:** STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA44.2 VS45 ( LEROY SOMER ) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

**Control panel**

**Optional:** DSE3110, AMF20 , HGM6110 , HGM6120.....



The DSE6010 is an Auto Start Control Module and the DSE6020 is an Auto Mains (Utility) Failure Control Module for single gen-set applications .

Both modules have been designed to work with electronic and non electronic engines providing advanced engine monitoring and protection features .