

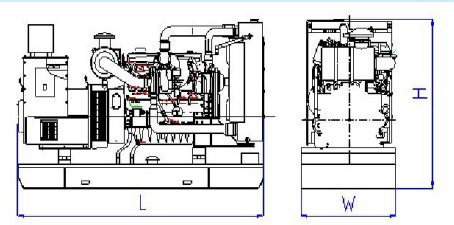
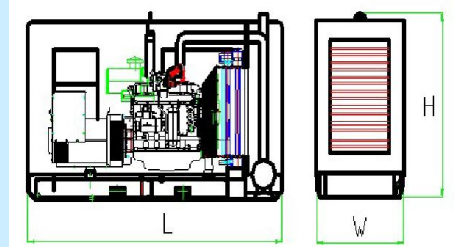
ENLP125-3

Standby power : 125KVA/100KW

Prime power : 109KVA/87KW

Standard features

- Engine: PERKINS , 1006TG1A
- Charge alternator : 12V
- Governor : Electrical
- Generator : LEROY SOMER , LSA44.2 VS3
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 12V battery and cable
- Industrial muffler
- User's manual

	Open Type Overall size (L*W*H) 2550mm×950mm×1535mm Weight: 1557kg
	Silent Type Overall size (L*W*H) 3436mm×1156mm×1968mm Weight: 2137kg

Generator Ratings

3-PH, 60Hz@1800RPM, 480/277V (Also Can Be Made According To Customers' Special Requirements)

Voltage	Hz	Phase	Power factor	Standby AMP	Standby rating (KVA/KW)	Primerating (KVA/KW)
480/277	60	3	0.8	144	125/100	109/87

Engine data

Manufacturer/Model	PERKINS 1006TG1A 4-cycle
Cylinder /Arrangement	6/ L
Displacement	5.99L
Bore and Stroke	100 mm×127 mm
Compression ratio	16.0 : 1
Rated RPM	1800 RPM
Max. stand by power at rated RPM	110.5KW
Frequency regulation , steady state	± 5%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	16.3m ³ /min
Exhaust temperature	543℃
Max back pressure	18kPa

Fuel System

Fuel consumption100% (of the Prime Power)	25.8L / h
---	-----------

Oil System

Total oil capacity w/filters	8 L
------------------------------	-----

Air intake

Engine air flow	6.27 m ³ /min
-----------------	--------------------------

Coolant System

Radiator & engine capacity	12.6 L
Max water temperature	110℃
Thermostat	82-93℃

Generator Data

Optional: STAMFORD, MARATHON, MECALETE, SMF.

Alternator Model	LSA44.2 VS3 (LEROY SOMER) Please Refer To The“ Genset Main Technical Data”
Phase/Connect	3-phase 4-wire ,Y type connection
Excitation Model	Self-excite,automatic voltage regulation,Insulation:H,Bruhless,Enclosure:IP21—IP23
Power Factor	0.8
The regulating rate of instantaneous voltage:	-15%~ +20%
The time of steady voltage:	≤1.5sec
The waving rate of voltage:	≤1.0%
The regulating rate of steady frequency:	≤5%
regulating rate of instantaneous frequency:	≤±10%
The time of steady frequency:	3sec
The waving rate of frequency:	≤1%

Control panel**Optional:** DSE3110, DSE6020, HGM6120, HGM6120.....

- ☆ Compact genset controller for single genset operating in standby mode;
- ☆ Meets all requirements for Auto Mains Failure (AMF) applications;
- ☆ Full gen-set monitoring and protection;
- ☆ Running hours event and performance log;
- ☆ Multiple languages (user changeable) in controller, even more in installation suite;
- ☆ Web Supervisor, Air Gate and Locate support*
- ☆ Plug-in extension modules capability;
- ☆ Automatic SMS on alarm or event & gen-set control over SMS*;
- ☆ Supports prime mover (MRS) applications;
- ☆ Automatic and manual GCB and MCB control;
- ☆ Optional GSM/GPRS modem/wireless Internet via IL-NT GPRS
- ☆ D+ pre-excitation terminal;

Note: All data sheets are for reference only and subject to change without prior notice.